


© 1999 Spinner GmbH Elektrotechnische Fabrik
 This drawing is proprietary to us. All rights reserved.
 Any use, transfer or reproduction of the drawing or the
 know-how contained therein requires our express consent.

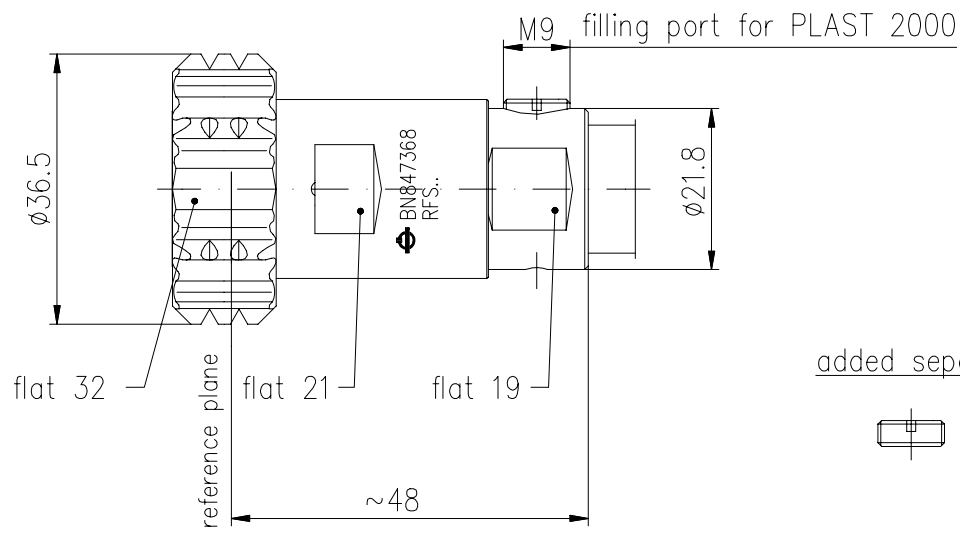

electrical data

| | |
|-----------------------|---|
| impedance | 50 Ohm |
| frequency range f/GHz | 0 < f ≤ 1 1 < f ≤ 2.7 2.7 < f ≤ 3.7 |
| VSWR | ≤ 1.02 ≤ 1.03 ≤ 1.06 |

material and surface

| | |
|-------------------|-----------------------------------|
| inner conductor | copper alloy/silver-plated |
| outer conductor | copper alloy/silver-plated |
| other metal parts | copper alloy/bright nickel-plated |
| insolation | PTFE/PE |
| sealing | silicone rubber PLAST 2000 |

version

mating face sealed

standards

CECC 22190, IEC 169-4


installation instructions

M30596

Diese Zeichnung ist unser Eigentum. Verwendung, Vervielfältigung,
 Weitergabe der Zeichnungen oder des darin enthaltenen
 Know-hows an Dritte nur mit unserer ausdrücklichen Genehmigung.

| | | | | |
|-------------------|--------|----------|----------|------|
| 01 | — | 1408 | 07.09.98 | Tr. |
| FW-Ind. | Anzahl | Änd.-Nr. | Tag | Name |
| FW-Änderungsindex | | | | |

modifications reserved

| | | | | | | | | | |
|--|---------|------|------|---|------------|--|--------------|--------|---------|
| DIMENSIONS WITHOUT TOLERANCES ACCORDING DIN ISO 2768-m PART 1 | | | | DATE | NAME | DESIGNATION: Cable Plug 7-16 (50 Ohm) for Cable LCF 12-50 Version: CAF-Monobloc | | | |
| | | | | DRAWN | 17.02.2000 | | | | Grund |
| | | | | CHECKED | 17.02.2000 | | | | Peschka |
| | | | | APPROVED | 13.03.2000 | | | | Wild |
| G IND.TRANSF 17.02.2000 Grund | | | |  Spinner GmbH Elektrotechnische Fabrik Erzgießereistraße 33 D-80335 München | | | DRAWING-NR.: | FORMAT | SCALE |
| ISS. | MOD.NR. | DATE | NAME | | | | 847368-0E | A4 | 1:1 |